



## SMART SWITCHING FULL FLEXIBILITY

The Invertec® 205-T *PULSE* has been designed and manufactured using the latest digital inverter technology allowing this machine to combine a rugged industrial construction with excellent arc characteristics. The Invertec 205-T *PULSE* is manufactured in a lightweight but robust outer casing, making it portable and ideal for operation, even in the most hazardous environments.

The single phase smart-switching 230V/400V primary input power makes it suitable for operation on site in conjunction with a generator or within a workshop environment, providing maximum flexibility.

The Invertec® V205-T *PULSE* is supplied as standard with all the features you would expect from a professional TIG welding machine including HF TIG ignition, Lift TIG ignition, 2 or 4 step, variable down slope and post flow control. The

V205-T *PULSE*, in addition, has a digital pre-set meter with a Hold Function and a built-in Variable Pulse. The control panel of this machine has been designed to show the welding sequence, making it user friendly and easy to understand. A unique feature is the variable high frequency PULSE that allows the welder to adjust arc focus to suit the application. This will reduce heat input, resulting in a more controlled weld, less distortion and increased welding speed.

The V205-T *PULSE* is air-cooled as standard. However by adding the Coolarc 20 water-cooler the unit is changed into a professional water-cooled TIG welder.


The Invertec® V205-T *PULSE* is made with a solid industrial construction, designed with the integrated features of a professional TIG welding machine capable of the toughest jobs.

## ADVANTAGES

- ✓ Single phase smart switching 230V / 400V primary input power
- ✓ Excellent arc characteristics, for a wide range of electrode types
- ✓ Input voltage compensation
- ✓ Generator compatible, ideal for site use
- ✓ HF and Lift TIG ignition meeting all requirements
- ✓ Full function user-friendly control panel layout for easy setup of welding parameters
- ✓ Air-cooled or Water-cooled with use of the Coolarc 20
- ✓ HIGH speed PULSE to adjust the arc focus, reduce distortion and increase travel speed
- ✓ Lightweight and portable
- ✓ Pre-set digital meter with hold function for fully procedured work
- ✓ Fan on demand built-in reduces the intake of dust and fumes
- ✓ Recessed controls and connections designed to eliminate damage
- ✓ Designed to meet EN60974-1 and CE standards for safety and reliability
- ✓ Build the Lincoln way 'RUGGED & RELIABLE'
- ✓ Two Year warranty on parts and labour

# Technical Details

## HIGH FREQUENCY PULSE

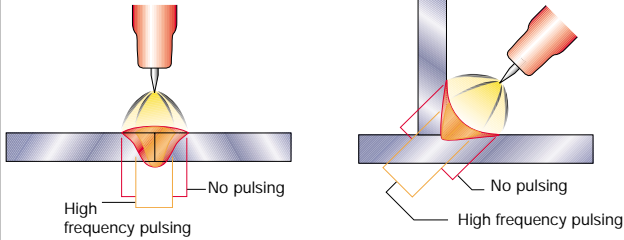

## FEATURES

Features	Parameters
Down Slope Time	0.5 - 20 sec
Post Flow Time	0.5 - 30 sec
PULSE Frequency (low)	0.2 - 20 Hz
PULSE Frequency (high)	3 - 300 Hz
On time peak	10 - 90% (of welding current)
Backgr./Peak Current	10 - 90% (of welding current)



## TECHNICAL SPECIFICATIONS


Product Name	Item Number	Primary Voltage	Fuse Size	Weight (kg)	Dimensions H x W x D (mm)	Protection Class	Insulation Class	Compliance
Invertec® V205-TP-2V	K12011-1	230/400V 1ph (+/-10%) 50/60Hz	35/20A (slow)	14	385x215x480	IP23S	H	EN 60974-1 / EN 50199 CE

## WELDING OUTPUT

Current Range	Rated Output (40°C)	Rated Input	O.C.V.
5 - 200A	200A/28V@35% 170A/26.8V@100%	6,5kW @35% 5,5kW @100%	48Vdc

## ACCESSORIES

Designation	Item number
Remote output control - 15m	K10095-1-15M
15m-extension cable for remote ctrl box	K10398
Foot Amptrol	K870
Undercarriage 2 wheels	W0200002
TIG torch & cable kit	Consult us

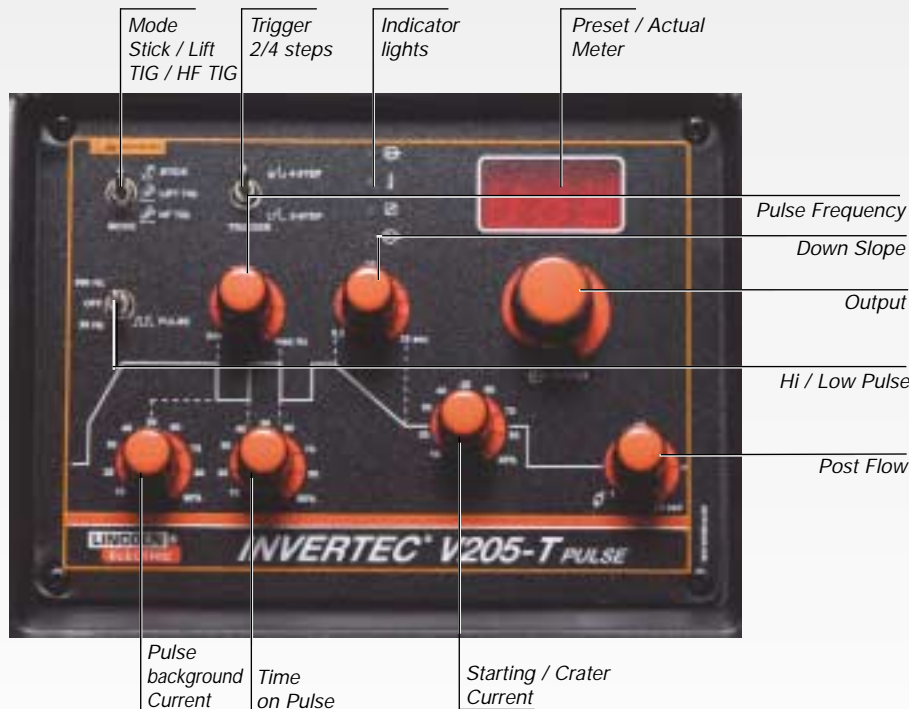

- United Kingdom: Lincoln Electric (UK) Ltd.  
Tel: +44 114 287 2401 Fax: +44 114 287 2582
- Belgium: Lincoln Smitweld Belgium  
Tel: +32 2 377 00 71 Fax: +32 2 378 18 77
- France: Lincoln Electric France SAS  
Tel: +33 232 11 40 40 Fax: +33 232 11 40 11
- Germany: Lincoln Smitweld G.m.b.H  
Tel: +49 201 896 280 Fax: +49 201 896 2831
- Italy: Lincoln Electric Italia, SRL  
Tel: +39 010 754 111 Fax: +39 010 754 1150
- The Netherlands: Lincoln Smitweld B.V.  
Tel: +31 24 352 29 11 Fax: +31 24 352 22 02
- Denmark: Lincoln Electric Nordic  
Tel: +45 86 26 51 00 Fax: +45 86 26 51 50
- Spain: Lincoln KD, Sa  
Tel: +34 93 685 9600 Fax: +34 93 685 9610
- Turkey: A.S. Kaynak  
Tel: +90 216 377 30 90 Fax: +90 216 377 00 00
- Poland: Lincoln Electric Bester S.A.  
Tel: +48 746 46 1100 Fax: +48 746 46 1082
- Other countries: Lincoln Electric Europe B.V.  
Tel: +31 24 352 29 27 Fax: +31 24 352 29 29

Your Lincoln Electric Distributor:

